



RX27-3A(RXG6A)型綫繞、RJ27-3A 型金屬膜瓷殼電阻器
Model RX27-3A(RXG6A)、RJ27-3A Stationary Resistor Winding




| 額定功率 Rated power (W) | 阻值範圍(Ω) Resistance ranges | | 外型尺寸(mm) Dimensions | |
|----------------------------|------------------------------|----------|------------------------|------|
| | RX | RJ | L | l |
| 5 | 0.2~750 | 820~56K | 27 | 15 |
| 7 | 0.6~1.2K | 1.3K~75K | 35 | 22.5 |
| 10 | 1~1.8K | 2.0K~82K | 48 | 35 |

RX27-3C(RXG6C)型綫繞、RJ27-3C 型金屬膜瓷殼電阻器
Model RX27-3C(RXG6C)、RJ27-3C Stationary Resistor Winding

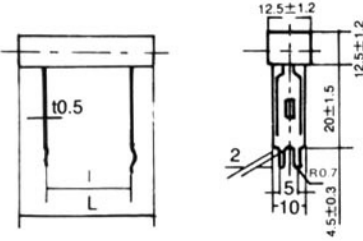


| 額定功率 Rated power (W) | 阻值範圍(Ω) Resistance ranges | | 外型尺寸(mm) Dimensions | |
|----------------------------|------------------------------|-----------|------------------------|------|
| | RX | RJ | L | l |
| 15 | 1~2.2K | 2.4K~91K | 48 | 32.5 |
| 20 | 1.5~2.7K | 3.0K~100K | 63.5 | 50.0 |

RX27-4(RXG7)型綫繞、RJ27-4 型金屬膜瓷殼電阻器
Model RX27-4(RXG7)、RJ27-4 Stationary Resistor Winding




| 額定功率 Rated power (W) | 阻值範圍(Ω) Resistance ranges | | 外型尺寸(mm) Dimensions | | | | |
|----------------------------|------------------------------|-----------|------------------------|------|----------------|----|-----|
| | RX | RJ | A/B | C | D ₁ | E | d |
| 10 | 1.0~1.8K | 2.0K~82K | 9.8 | 48 | 25 | 33 | 4 |
| 15 | 1.2~2.2K | 2.4K~91K | 13 | 48 | 28.5 | 33 | 4 |
| 20 | 1.5~2.7K | 3.0K~100K | 13 | 63.5 | 28.5 | 49 | 4 |
| 30 | 1.8~3.3K | 3.6K~120K | 19 | 75 | 38 | 55 | 4.2 |
| 40 | 2.2~4.7K | 5.1K~150K | 19 | 90 | 38 | 70 | 4.2 |

RX27-5 型綫繞、RJ27-5 型金屬膜瓷殼電阻器
Model RX27-5、RJ27-5 Stationary Resistor Winding



| 額定功率 Rated power (W) | 阻值範圍(Ω) Resistance ranges | | 外型尺寸(mm) Dimensions | | | | |
|----------------------------|------------------------------|----------|------------------------|------|------|-----|-----|
| | RX | RJ | A | B | C | E | d |
| 2 | 0.1~430 | 470~33K | 11.0 | 7.0 | 20.5 | 5.0 | 0.8 |
| 3 | 0.1~680 | 750~43K | 12.0 | 8.0 | 25.0 | 5.0 | 0.8 |
| 5 | 0.1~680 | 750~56K | 13.0 | 9.0 | 25.5 | 5.0 | 0.8 |
| 7 | 0.1~1.3K | 1.5K~75K | 13.0 | 10.0 | 38.5 | 5.0 | 0.8 |
| 10 | 0.1~2.2K | 2.4K~82K | 14.0 | 11.0 | 52.0 | 5.0 | 0.8 |

RX24 型功率綫繞電阻器
RX24 Aluminium Shell Winding Resistor



| 額定功率 Rated power (W) | 阻值範圍 Resistance ranges (Ω) | 外型尺寸(mm) Dimensions | | |
|----------------------------|----------------------------------|------------------------|----|----|
| | | A | B | C |
| 10 | 0.05~5K | 18 | 12 | 13 |
| 25 | 0.05~15K | 26 | 12 | 13 |
| 50 | 0.05~39K | 54 | 13 | 16 |