
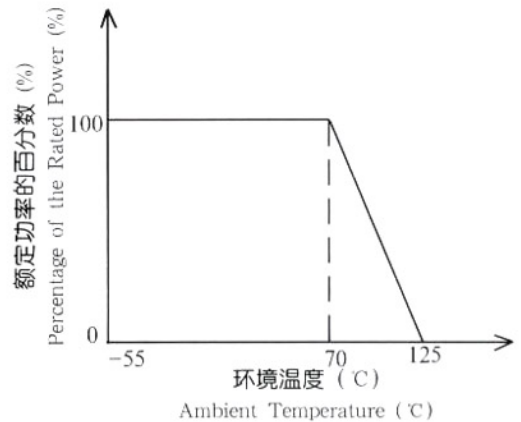


RX70 型精密线绕电阻器

TYPE RX70 PRECISION WIRE-WOUND RESISTORS

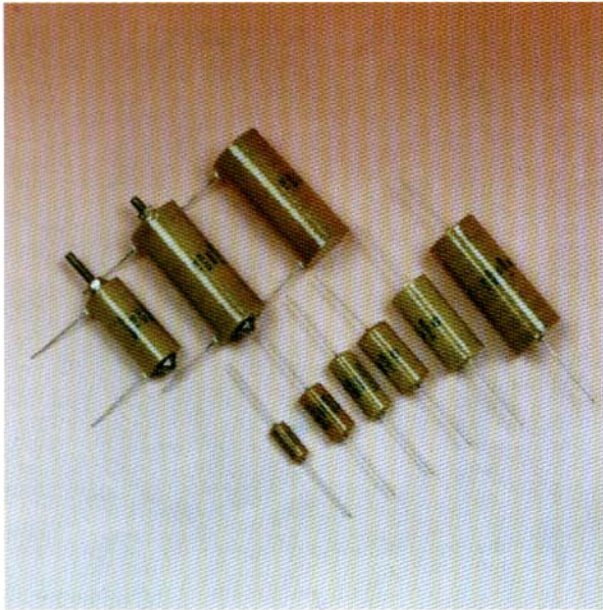

型号 Type	额定功率 Rated Power (W)	阻值范围 Resistance Range (Ω)	阻值允许偏差 Tolerances (%)	温度系数 Temperature Coefficient ($\times 10^{-6}/^{\circ}\text{C}$)	极限电压 Limiting Voltage (V)	外形尺寸 (max) Dimensions (mm)			
						D	L	d	M
RX70-0.25	0.25	1 ~ 500k	± 0.01 (100 Ω ~ 10M Ω)	± 10	300	8	15.5	0.8	
RX70-0.5	0.5	1 ~ 1M	± 0.02 (50 Ω ~ 10M Ω)		500	12	21	0.8	3
RX70-0.75	0.75	1 ~ 2M	± 0.05 (20 Ω ~ 10M Ω)	± 15	1000	12	28	0.8	
RX70-1	1	1 ~ 4M	± 0.1 (10 Ω ~ 10M Ω)		1000	15	27.5	0.8	3
RX70-2	2	1 ~ 5M	± 0.2 (5 Ω ~ 10M Ω)	± 20	1000	18	38	0.8	4
RX70-3	3	1 ~ 10M	± 0.5 (1 Ω ~ 10M Ω)		1500	24	56	0.8	4

*: D 为电阻器主体直径; L 为电阻器主体长度; d 为电阻器引出端直径; M 为螺栓直径。

Note: D is the diameter of the resistor proper; L is the length of the resistor proper;

d is the diameter of the leading-out terminal of the resistor;

M is the diameter of the bolt.