
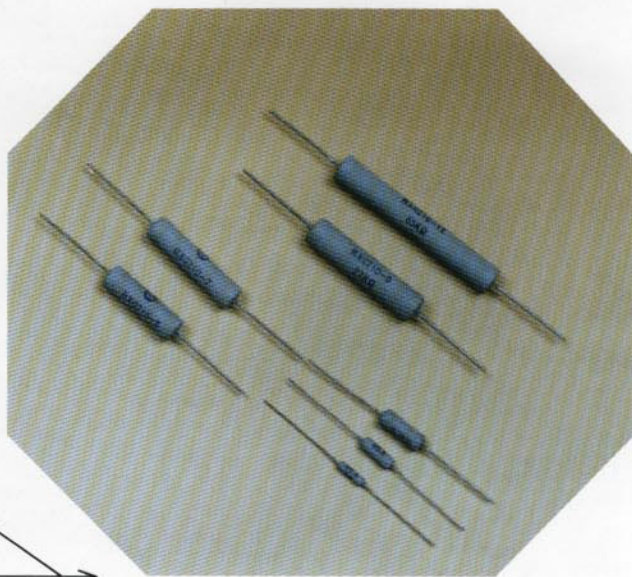


# RXG210 型功率型被漆线绕电阻器

## TYPE RXG210 POWER MODE ENAMELLED WIRE-WOUND RESISTORS

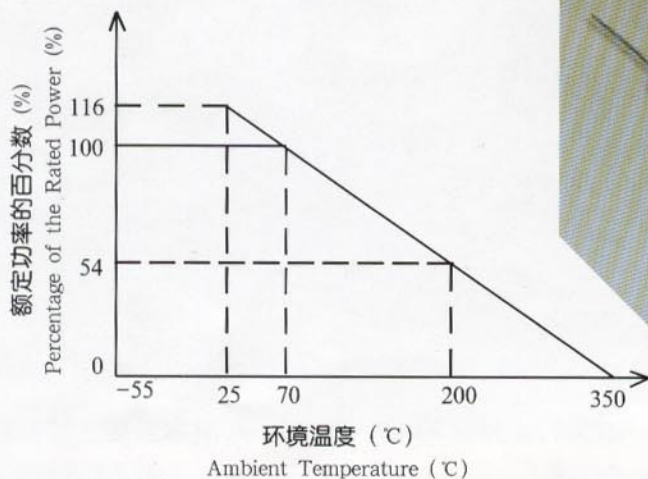

型号 Type	额定功率 Rated Power (W)	阻值范围 Resistance Range (Ω)	阻值允许偏差 Tolerances (%)	极限电压 Limiting Voltage (V)	外形尺寸 (max) Dimensions (mm)		
					D	L	d
RXG210-1	1	0.1 ~ 600	± 1 (20Ω ~ 65k) ± 2 (10Ω ~ 65k) ± 5 (0.2Ω ~ 65k) ± 10 (0.1Ω ~ 65k)		3	9	0.6
RXG210-2	2	0.1 ~ 1.5k			4.5	11	0.6
RXG210-3	3	0.1 ~ 5.1k		100	5.5	15	0.8
RXG210-5	5	0.1 ~ 10k		200	8	25	0.8
RXG210-7	7	0.1 ~ 33k		300	8	33	0.8
RXG210-9	9	0.1 ~ 50k		500	9	37	1
RXG210-12	12	0.1 ~ 65k		750	9	53	1

\*: D为电阻器主体直径。L为电阻器主体长度。d为电阻器引出端直径

Note: D is the diameter of the resistor proper;

L is the length of the resistor proper;

d is the diameter of the leading-out terminal of the resistor.